JC871 U.S. PTO
11/17/00

11-20-00

A

HAVERSTOCK & OWENS LLP
260 Sheridan Avenue, Suite 420
Palo Alto, California 94306
(650) 833-0160

BOX NEW PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D C. 20231

Attorney Docket No.: MLNR-06501

JC571 U.S. PTO
09/715556
11/17/00

NEW APPLICATION TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of Inventor. Gwilym Francis Luff

Title: **IRIS DATA RECOVERY ALGORITHMS**

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date, November 17, 2000, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL703212051US addressed to: **PATENT APPLICATION**, Assistant Commissioner for Patents, Washington, D.C. 20231.

Tadas Narauskas
(Name of Person Mailing Paper)

Tadas Narauskas
Signature

Enclosed are:

The papers required for filing date under CFR § 1 53(b):

16 Pages of Specification (including claims); 2 Sheet(s) of Drawings.
X Formal
_ Informal

X Declaration or Oath
X Power of Attorney By Assignee
X Assignment of the Invention to Micro Linear Corporation (including Form PTO-1595)

Fee Calculation

_ Amendment changing number of claims or deleting multiple dependencies is enclosed

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee
				$710 00
Total Claims	31 - 20 =	11	$18.00	198 00
Independent Claims	3 - 3 =	0	$80.00	0.00
Multiple Dependent claim(s), if any			$270.00	
			Filing Fee Calculation	$908 00

6. X Verified Statement (Declaration) Claiming Small Entity Status

50% Filing Fee Reduction (if applicable) $454.00

7. Other Fees

X Assignment Recordation Fee 40 00

_ Other 0 00

TOTAL FEES ENCLOSED **$494.00**

8. Payment of Fees

X Check in the amount of $494.00 ($454.00 for the basic filing fee plus $40.00 for the assignment recordation fee) enclosed.

9. X Authorization to Charge Additional Fees

The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1 16 or § 1 17 to Account No. 08-1275. **An originally executed duplicate of this transmittal is enclosed for this purpose**

10. _ Information Disclosure Statement

11. X Return Receipt Postcard

Dated: November 17, 2000

By: Thomas B. Haverstock
Name. Thomas B. Haverstock
Registration No.: 32,571

EXPRESS MAIL LABEL NO. EL703212051US

PATENT
Attorney Docket No. ML ~~NR-06501~~

Applicant Or Patentee: Gwilym Francis Luff
Serial or Patent No.:
Filed or Issued: herewith
Entitled: IRIS DATA RECOVERY ALGORITHMS

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR § 1.9(c)) - SMALL BUSINESS CONCERN

I hereby declare that I am

X the owner of the small business concern identified below
an official of the small business concern empowered to act on behalf of the concern identified below:

Name of Concern: **Micro Linear Corporation**
Address of Concern: **2092 Concourse Drive**
San Jose, California 95131

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR §§ 121.3-18, and reproduced in 37 CFR § 1.9(d), for purposes of paying reduced fees under Sections 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled **IRIS DATA RECOVERY ALGORITHMS** by inventor(s) Gwilym Francis Luff as described in

X the specification filed herewith
__ Application Serial No. , filed
__ Patent No. , issued

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR § 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR § 1.9(d) or a nonprofit organization under 37 CFR § 1.9(e).

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR § 1.27)

Full Name: _____
Address: _____
[] Individual [] Small Business Concern [] Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR § 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Person Signing: MICHAEL SCHRADLE

Title in Organization: _____

Address of Person Signing: Micro Linear Corporation, 2092 Concourse Drive, San Jose, California 95131

Dated: 11/17/00 Signature: [signature]

0525.2003

PATENT
Atty. Docket No. MLNR-06501

IRIS DATA RECOVERY ALGORITHMS

Related Applications:

This application claims priority under 35 U.S.C. § 119(e) of the co-pending U.S. provisional application Serial Number 60/167,430 filed on November 23, 1999 and entitled "IRIS DATA RECOVERY ALGORITHMS." The provisional application Serial Number 60/167,430 filed on November 23, 1999 and entitled "IRIS DATA RECOVERY ALGORITHMS" is also hereby incorporated by reference.

Field of the Invention:

The present invention relates to the field of radio transmitters and receivers. More particularly, the present invention relates to the field of data recovery algorithms implemented in a radio transmitter or receiver circuit.

Background of the Invention:

Due to the rapid growth in the area of digital cordless telephony, cordless telephones are fast becoming more than merely home appliances. Recent developments in cordless telephone technology such as phones that support higher data rate and sophisticated applications such as wireless private branch exchanges have made it necessary to develop a digital cordless standard.

One of the first such standards was the Digital European Cordless Telecommunications (DECT) system. DECT is designed as a flexible interface to provide cost-effective communications services to high user densities in small cells. This standard is intended for applications such as domestic cordless telephony, telepoint and radio local loop. It supports multiple bearer channels for speech and data transmission, hand over, location registration and

paging. DECT is based on time division duplex and time division multiple access. Gaussian filtered FSK (GFSK) modulation scheme is employed in DECT. GFSK is a premodulation Gaussian filtered digital FM scheme. In order to comply with the standards set out by DECT, a data recovery algorithm must be implemented in the receiver circuit of a cordless telephone. This data recovery algorithm is used in certain applications including a transmitter and a receiver such as a cordless phone where an error may occur when the frequency of the transmitter does not match the expected frequency of the receiver. This frequency shift will turn into a DC shift in the analog waveform, making the data difficult to receive and read.

Existing data recovery algorithms utilize a traditional decision feedback equalizer (DFE) or data slicer which includes both feedforward and feedback paths. Consequently, these type of DFEs require either an analog to digital converter (ADC) and a digital signal processor (DSP) or some analog delay mechanism in order to achieve the desired output. Additionally, traditional applications will utilize an integrating capacitor to acquire the DC level of the incoming signal during the preamble portion of the input signal.

The reference frequency accuracy specifications for DECT allow for a frequency error of up to 100KHz between two radios. To allow for this error, as well as any residual error in the discriminator's center frequency, an adaptive data slicer threshold is needed. Most DECT radios use a first order linear feedback loop to set up a slicing threshold. The loop is activated during preamble and the synchronization word (sync word), but then the loop is opened once the sync word is detected by the baseband processing and the slice level held on the off-chip capacitor for the remainder of the data packet. There is a trade-off between the initial acquisition and sensitivity to the data pattern. There are only 32 bits available to set up the DC level, including 16 bits of preamble and 16 bits of sync word, which requires a fairly short time constant. However, the sync word is followed by arbitrary data in a field which carries medium access

control information. In the few bits processing delay while the baseband recognizes the sync word, the slice level can become corrupted. Traditional circuits suffer quite badly from this process because the tight post detection filtering decreases the amplitude of the preamble relative to the long '1' or '0' sequences.

Figure 1 is a block schematic diagram of an existing DFE circuit 10 or data slicer. In this circuit 10, an input signal 22 which has been filtered by a Gaussian filter is input to a comparator 12 along with a feedback signal 14. An output signal 26 is coupled with a switch 16 which is operated by a switch control signal 24. When the switch 16 is closed, the output signal is coupled with a coupling resistor 18 and a slicing capacitor 20 which are coupled together in series and grounded 28.

In addition to the aforementioned problems associated with traditional DFE circuits, a user of a radio or phone including a traditional data slicer circuit will oftentimes run into other problems. For instance, the traditional circuit does not exhibit a satisfactory sensitivity or range. Also, traditional data slicer circuits require additional circuitry to operate properly, adding to the complexity and cost of the circuit.

Summary of the Invention:

A circuit with a preamble detector, a DC level set portion and a data slicer is configured to receive an input signal including a preamble portion, a unique word portion and a data portion. Additionally, the circuit is configured to receive a control signal and provide an output signal.

The preamble detector receives the input signal and provides a preamble signal which is active during the preamble portion of the input signal and inactive during the unique word and data portions of the input signal.

The DC level set circuit receives the input signal, the control signal and the preamble

signal from the preamble detector. The DC level set circuit derives a level set signal output using a pair of summers, a comparator, a functional AND gate and an integrating capacitor coupled in parallel with a current source for charging or discharging the integrating capacitor. This level set signal is then outputted to the data slicer.

The data slicer uses a feedback path including a comparator, a delay line and a summer to provide the output signal of the circuit.

Brief Description of the Drawings:

Fig. 1 illustrates a block schematic diagram of a decision feedback equalizer of the prior art.

Fig. 2 illustrates a block schematic diagram of the preferred embodiment of the present invention.

Fig. 3 illustrates a schematic diagram of the preferred embodiment of the present invention.

Detailed Description of a Preferred Embodiment:

A block schematic diagram of the preferred embodiment of the Iris Data Recovery Algorithm is depicted in Figure 2. A preamble detector circuit 100 receives an input signal V_{IN} and outputs an active preamble signal 112. A DC level set signal 200 receives the same input signal V_{IN} along with the preamble signal 112, a delay output 132 and a control signal V_C. The DC level set circuit 200 outputs a level set signal 300 to a data slicer circuit 400. The data slicer circuit 400 provides an output signal V_{OUT}.

A schematic diagram of the this preferred embodiment of the Iris Data Recovery Algorithm is depicted in Figure 3. This figure provides a more detailed depiction of the

operation of the preferred embodiment of the present invention. An incoming communications signal such as an FM Demodulator output is received and routed to a gaussian filter 105. The gaussian filter 105 utilized in the preferred embodiment can be a standard function used readily in the industry. The filtered output of the gaussian filter 105 is the input signal V_{IN} to the present invention. The filtered input signal V_{IN} is input to both the preamble detector circuit 100 and the DC level set circuit 200.

In the preamble detector circuit 100, the filtered input signal V_{IN} is input to an AC coupling circuit102. The AC coupling circuit 102 removes DC offset from the input signal V_{IN} and inputs the signal into a comparator 104 which recovers the digital output from the signal. The output of the comparator 104 is then input to a 4-bit delay line 108, a preamble detector 110 and a delay element 114. The 4-bit delay line 108 will hold a 4-bit sequence of the incoming signal before outputting it to the preamble detector 110. When the preamble detector 110 senses a preamble portion of the signal "01010" or "10101", it provides an active preamble signal 112 to the DC level set circuit 200, indicating the presence of a preamble portion in the signal. The delay element 114 delays the signal from the comparator 104 to compensate for phase advance caused by the AC coupling 102 before also outputting a delay output 132 to the DC level setting circuit 200. In the preferred embodiment, the delay is set to one twelfth of one bit.

In a wireless system comprising wireless communication between two digital devices, an error occurs when the frequency of the transmitter does not match the frequency expected in the receiver. This error can result in a DC shift in the analog waveform. The preferred embodiment of the present invention includes the DC level set circuit 200 in both the transmitter and the receiver to reduce or eliminate the error in the analog waveform.

The DC level set circuit 200 of the preferred embodiment of the present invention includes an AND gate 120 that receives both the preamble signal 112 from the preamble detector

circuit 100 and a control voltage signal V_C. The AND gate 120 outputs a control signal 122 that closes the switch 150 when both the control signal V_C and the preamble signal 112 are active. The DC level set circuit 200 also includes a comparator 106 that compares the input signal V_{IN} with a stored value 162 of an integrating capacitor 160. The integrating capacitor 160 is charged or discharged by a current source 164. The current source 164 will charge or discharge the integrating capacitor 160 depending on a charge signal 142 output by a first summer 140 when the switch 150 is closed. The first summer 140 adds the output of the comparator 106 to the delay output 132 from the delay element 114 of the preamble detector circuit 100. Further, the charge signal 142 is directly proportional to the output of the comparator 106. Therefore, when the stored value 162 is less than the input signal V_{IN}, the charge signal 142 causes the current source 164 to charge the integrating capacitor 160. When the stored value 162 is more than the input signal V_{IN}, the charge signal 142 causes the current source 164 to discharge the integrating capacitor 160. The integrating capacitor 160 is also coupled with a ground terminal 166.

Also in the DC level set circuit of the preferred embodiment of the present invention, the stored value 162 is added to the input signal V_{IN} in a second summer 120. The output of the second summer 120 is the level set signal 300, that is in turn, inputted to the data slicer circuit 400.

The preferred embodiment of the data slicer circuit 400 is also depicted in Figure 3. The data slicer circuit receives the level set signal 300 in a third summer 310. The third summer 310 subtracts a scaled feedback signal 350 from the level set signal 300. The output of the third summer 310 is input to a third comparator 310 that recovers the digital output from the signal and outputs in turn the final output signal V_{OUT}.

The output signal V_{OUT} is also fed to a feedback block 360. The feedback block 360 includes a delay element 330 and a scaling element 340. In the preferred embodiment, the delay

element 330 delays the signal by one bit duration and the scaling element 340 scales the signal by .17. The output of the scaling element 340 is the feedback signal 350, which is input to the third summer 310.

Lastly, in the preferred embodiment of the present invention, the input signal V_{IN} comprises a preamble portion, a unique word portion and a data packet portion. In alternate embodiments of the present invention, specifically in applications where the DECT standard applies, the input signal comprises a preamble portion, a unique word portion, a medium access control (MAC) and a data packet portion. In other standards, the MAC portion may be substituted for some similar type of control data. This control data is typically used to communicate to the receiver information describing the forthcoming data packet.

The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. Such reference herein to specific embodiments and details thereof is not intended to limit the scope of the claims appended hereto. It will be apparent to those skilled in the art that modifications may be made in the embodiment chosen for illustration without departing from the spirit and scope of the invention. Specifically, it will be apparent to one of ordinary skill in the art that the device of the present invention could be implemented in several different ways and the apparatus disclosed above is only illustrative of the preferred embodiment of the invention and is in no way a limitation.

Claims:

What is claimed is:

1. In a wireless receiver, a circuit for receiving an input signal from a transmitter, the input signal including a preamble portion, a unique word portion and a data portion, the circuit comprising:

 a. a preamble detector configured to receive the input signal and to provide a preamble signal where the preamble signal is active during the preamble portion of the input signal and inactive during all portions of the input signal other than the preamble portion;

 b. a DC level set circuit configured to receive the preamble signal, the input signal including the preamble portion, the unique word portion and the data portion and to receive the control signal and to provide a level set signal; and

 c. a data slicer circuit coupled with the DC level set circuit to receive the level set signal and to provide the output signal.

2. The circuit of Claim 1 wherein the preamble detector comprises:

 a. an AC coupling for removing a direct current offset from the input signal;

 b. a first comparator for recovering a digital output from the AC coupling;

 c. a four bit delay line for detecting and for holding the preamble portion of the input signal;

 d. a lower block coupled with both the four bit delay line and the first comparator for providing the preamble signal when the four bit delay line detects the preamble portion of the input signal; and

e. a delay element for receiving the input signal and for providing a delay signal to the DC level set circuit.

3. The preamble detector of Claim 2 wherein the lower block outputs the active output to the DC level set circuit.

4. The preamble detector of Claim 2 wherein the delay element delays the input signal one-twelfth of one bit.

5. The circuit of Claim 1 wherein the DC level setting circuit comprises:

a. a functional AND gate for receiving the preamble signal and the control signal and outputting a switch signal when both the control signal and the preamble signals are active;

b. an integrating capacitor coupled in parallel with a current source for charging or discharging the integrating capacitor;

c. a second comparator for comparing the input signal to an output from the integrating capacitor and for outputting a charge signal;

d. a first summer for adding the delay signal from the preamble detector to the charge signal of the second comparator;

e. a switch for providing an electrical connection from the first summer to the current source; and

f. a second summer for adding the output of the integrating capacitor with the input signal and for outputting the level set signal to the data slicer.

6. The DC level setting circuit of Claim 5 wherein when the charge of the integrating capacitor is less than the input signal, the charge signal causes the current source to charge the integrating capacitor.

7. The DC level setting circuit of Claim 5 wherein when the charge of the integrating capacitor is more than the input signal, the charge signal causes the current source to discharge the integrating capacitor.

8. The DC level setting circuit of Claim 5 wherein the switch closes when the functional AND gate outputs the switch signal, and opens when the switch signal is not outputted by the functional AND gate.

9. The circuit of Claim 1 wherein the data slicer circuit comprises:

a. an analog comparator;

b. a one bit resolution delay line; and

c. a third summer.

10. The data slicer circuit of Claim 9 wherein a third summer is configured to receive the level set signal from the DC level set circuit.

11. The data slicer circuit of Claim 9 wherein the third summer subtracts a scaled feedback signal from the level set signal.

12. The data slicer circuit of Claim 9 wherein the analog comparator is configured to receive

an output of the third summer and to produce the output signal.

13. The data slicer circuit of Claim 9 wherein the one bit resolution delay line is configured to receive the output signal as a feedback signal.

14. The data slicer circuit of Claim 9 wherein the one bit resolution delay line outputs the scaled feedback signal.

15. A method of receiving an input signal and a control signal and providing an output signal, the input signal including a preamble portion, a unique word portion and a data portion, the method comprising the steps of:

a. receiving the input signal with a preamble detector;

b. providing a preamble signal where the preamble signal is active during the preamble portion of the input signal and inactive during all portions of the input signal other than the preamble portion;

c. receiving the preamble signal from the preamble detector, the input signal and the control signal with a DC level set circuit;

d. providing a level set signal with the DC level set circuit;

e. receiving the level set signal from the DC level set circuit with a data slicer circuit; and

f. providing the output signal with the data slicer circuit.

16. The method of Claim 15 wherein the preamble detector provides the preamble signal to the DC level setting circuit when a four bit delay line detects the preamble portion of the

input signal.

17. The method of Claim 15 wherein the data slicer circuit provides the output signal by:

$$d_k = x_k - 0.17d_{k-m}$$

where d_k is the current output, x_k is the current input and d_{k-m} is the previous bit decision.

18. A circuit for receiving an input signal and a control signal and providing an output signal, the input signal including a preamble portion, a unique word portion and a data portion, the circuit comprising:

a. means for receiving the input signal with a preamble detector;

b. means for providing a preamble signal where the preamble signal is active during the preamble portion of the input signal and inactive during all portions of the input signal other than the preamble portion;

c. means for receiving the preamble signal from the preamble detector, the input signal and the control signal with a DC level set circuit;

d. means for providing a level set signal with the DC level set circuit;

e. means for receiving the level set signal from the DC level set circuit with a data slicer circuit; and

f. means for providing the output signal with the data slicer circuit.

19. The circuit of Claim 18 wherein the preamble detector comprises:

a. an AC coupling for removing a direct current offset from the input signal;

b. a first comparator for recovering a digital output from the AC coupling;

c. a four bit delay line for detecting and for holding the preamble portion of the input

signal;

d. a lower block coupled with both the four bit delay line and the first comparator for providing the preamble signal when the four bit delay line detects the preamble portion of the input signal; and

e. a delay element for receiving the input signal and for providing a delay signal output to the DC level set circuit.

20. The preamble detector of Claim 19 wherein the lower block outputs the active output to the DC level set circuit.

21. The preamble detector of Claim 19 wherein the delay element delays the input signal one-twelfth of one bit.

22. The circuit of Claim 18 wherein the DC level setting circuit comprises:

a. a functional AND gate for receiving the preamble signal and the control signal and outputting a switch signal when both the control signal and the preamble signals are active;

b. an integrating capacitor coupled in parallel with a current source for charging or discharging the integrating capacitor;

c. a second comparator for comparing the input signal to an output from the integrating capacitor and for outputting a charge signal;

d. a first summer for adding the delay signal from the preamble detector to the charge signal of the second comparator;

e. a switch for providing an electrical connection from the first summer to the

current source; and

f. a second summer for adding the output of the integrating capacitor with the input signal and for outputting the level set signal to the data slicer.

23. The DC level setting circuit of Claim 22 wherein when the charge of the integrating capacitor is less than the input signal, the charge signal causes the current source to charge the integrating capacitor.

24. The DC level setting circuit of Claim 22 wherein when the charge of the integrating capacitor is more than the input signal, the charge signal causes the current source to discharge the integrating capacitor.

25. The DC level setting circuit of Claim 22 wherein the switch closes when the functional AND gate outputs the switch signal, and opens when the switch signal is not outputted by the functional AND gate.

26. The circuit of Claim 18 wherein the data slicer circuit comprises:

a. an analog comparator;

b. a one bit resolution delay line; and

c. a third summer.

27. The data slicer circuit of Claim 26 wherein a third summer is configured to receive the level set signal from the DC level set circuit.

28. The data slicer circuit of Claim 26 wherein the third summer subtracts a scaled feedback signal from the level set signal.

29. The data slicer circuit of Claim 26 wherein the analog comparator is configured to receive an output of the third summer and to produce the output signal.

30. The data slicer circuit of Claim 26 wherein the one bit resolution delay line is configured to receive the output signal as a feedback signal.

31. The data slicer circuit of Claim 26 wherein the one bit resolution delay line outputs the scaled feedback signal.

Abstract:

A data recovery algorithm for implementation in a radio transmitter or receiver that includes a direct current level setting circuit with a preamble detector which will establish a threshold for a simplified decision simplified equalizer slicer that improves receiver performance in a feedback manner by utilizing an analog comparator, a one symbol long one bit resolution delay line and a summing junction.

DOCKET ALARM

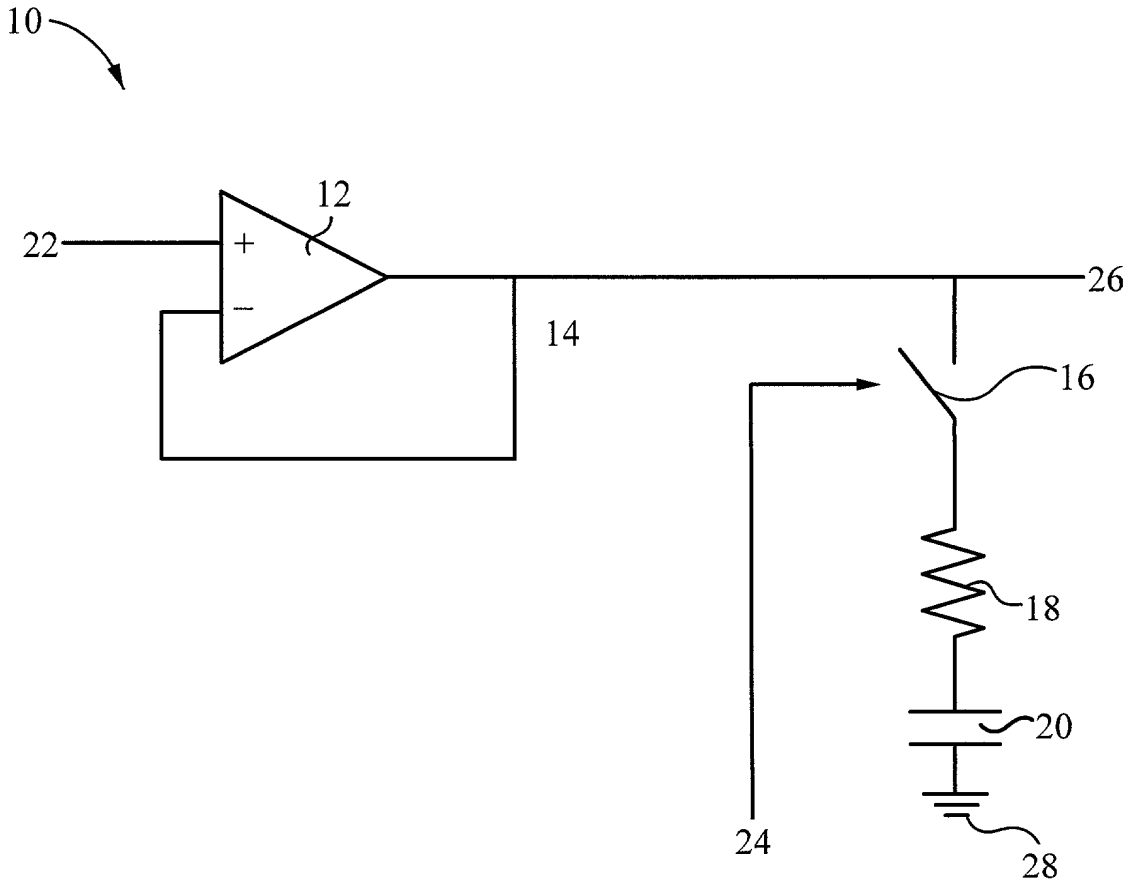


Fig. 1 (PRIOR ART)

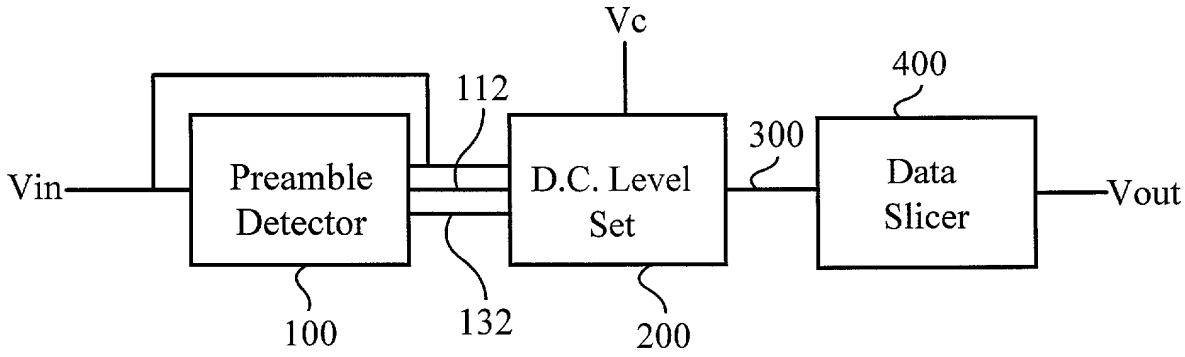


Fig. 2

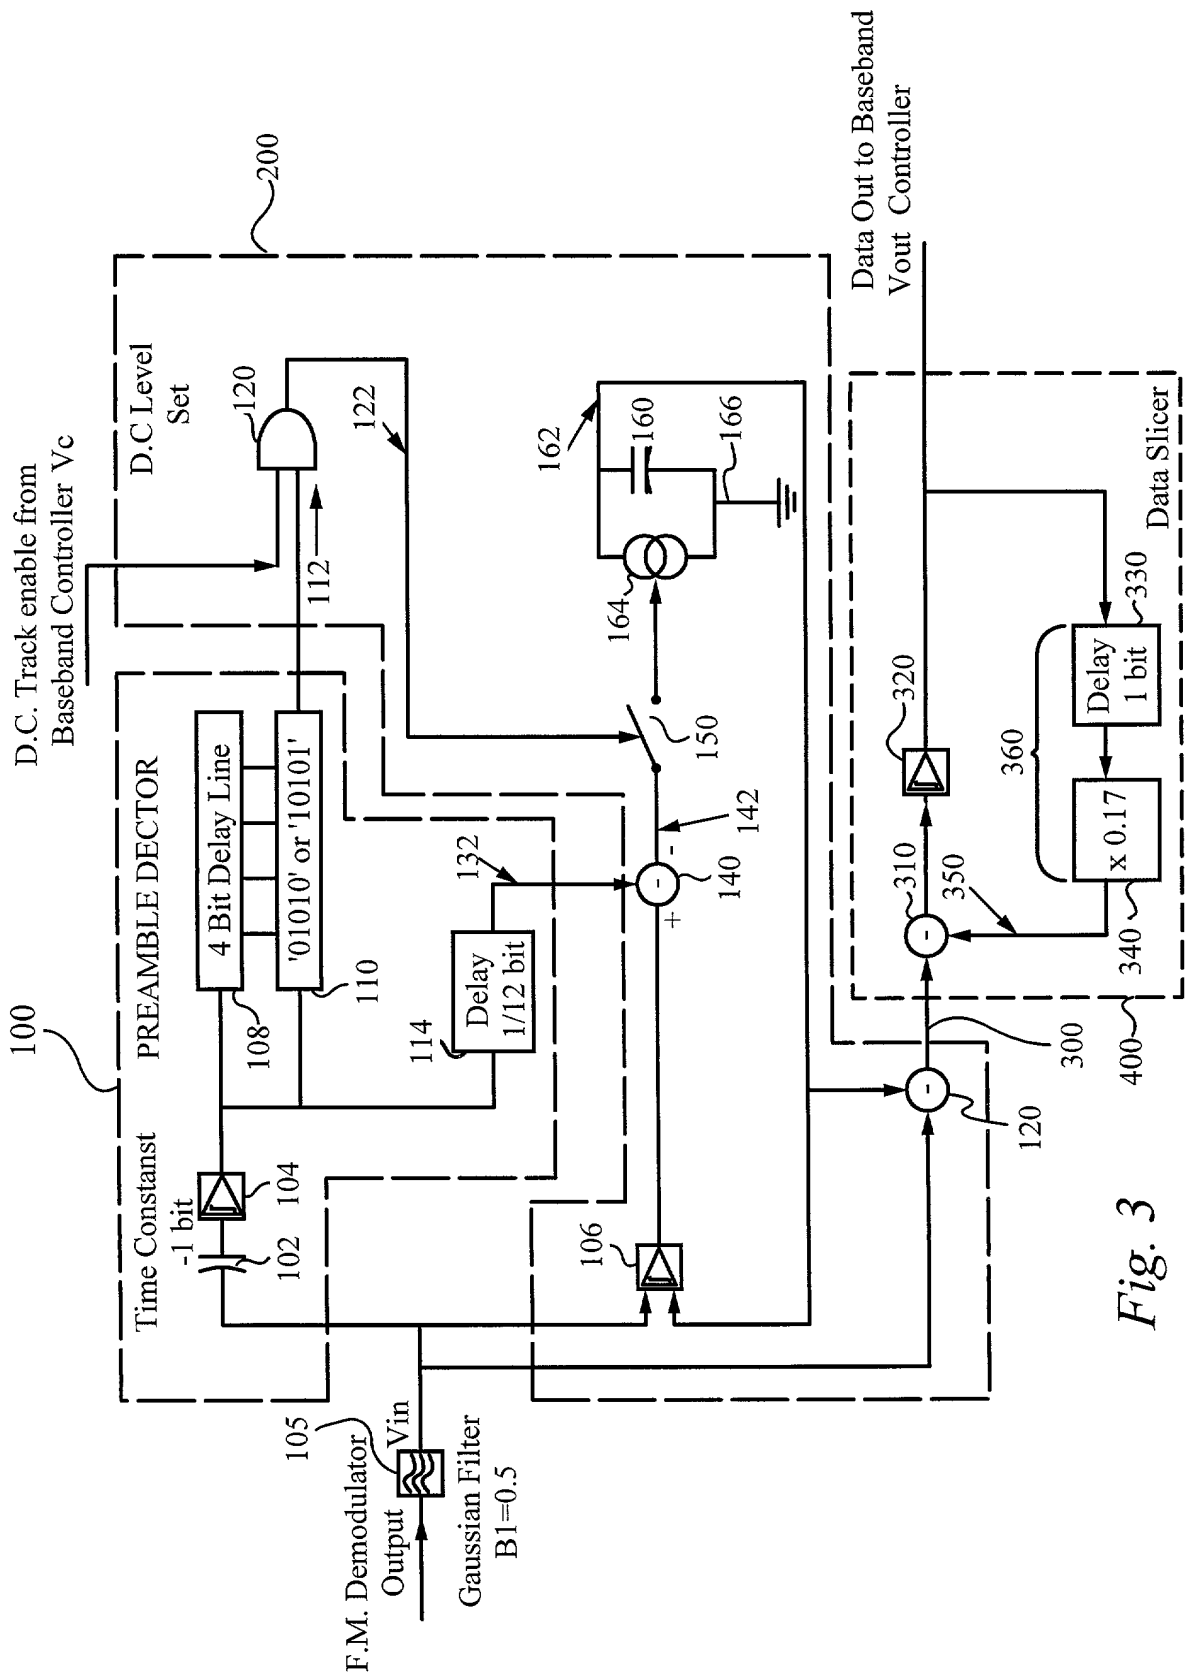

100
PREAMBLE DECTOR
Time Constanst
-1 bit
102
104
4 Bit Delay Line
'01010' or '10101'
108
110
112
D.C. Track enable from
Baseband Controller Vc
D.C Level
Set
120
122
200
Delay
1/12 bit
114
132
140
142
150
162
160
166
164
106
105
F.M. Demodulator
Output
Vin
Gaussian Filter
B1=0.5
Data Out to Baseband
Vout Controller
Data Slicer
300
400
310
320
330
340
350
360
Delay
1 bit
x 0.17

Fig. 3

EXPRESS MAIL LABEL NO. EL703212051US

PATENT
Attorney Docket No ML JR-06501

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:	)	Group:
	)	Art Unit:
Gwilym Francis Luff	)	Examiner.
	)	
Serial No..	)	
	)	
Filed herewith	)	**POWER OF ATTORNEY BY ASSIGNEE**
	)	
For: **IRIS DATA RECOVERY ALGORITHMS**	)	
	)	

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Micro Linear Corporation, Assignee of the above-identified application by Assignment dated ___ _____ hereby appoints the members of the firm of HAVERSTOCK & OWENS LLP, a firm including Thomas B. Haverstock (Reg. No. 32,571) and Jonathan O. Owens (Reg. No. 37,902) 260 Sheridan Avenue, Suite 420, Palo Alto, California 94306, telephone: (650) 833-0160, facsimile: (650) 833-0170, as its attorneys with full power of substitution to prosecute this application and to transact all business in the Patent and Trademark Office in connection therewith.

Please direct all correspondence regarding this application to the following.

Thomas B. Haverstock
HAVERSTOCK & OWENS LLP
260 Sheridan Avenue, Suite 420
Palo Alto, California 94306
Telephone: (650) 833-0160
Facsimile: (650) 833-0170

I hereby certify that the Assignment document filed with the application or filed subsequent to the filing date of the application, has been reviewed and I hereby certify that, to the best of my knowledge and belief, title is with **Micro Linear Corporation**.

Micro Linear Corporation

Dated: 11/17/00

By: _____
Name: MICHAEL SCHRADER
Title: CFO

DOCKET ALARM

EXPRESS MAIL LABEL No. EL703212051US

DECLARATION FOR PATENT APPLICATION

As the below-named inventor, I hereby declare that.

My residence, post office address and citizenship are as stated next to my name I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **IRIS DATA RECOVERY ALGORITHMS** The specification of which is attached hereto. I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1 56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States filed by me on the same subject matter having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claim	
			Yes	No
Number	Country	Day/Month/Year Filed		
Number	Country	Day/Month/Year Filed		

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1 56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application

Application Serial No.	Filing Date	Status: Patented, Pending, Abandoned

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

60/167,430	November 23, 1999
Application Serial No.	Filing Date

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole Joint Inventor: Gwilym Francis Luff

Inventor's Signature: _____ Date 17 Nov 2000

Residence: 18, The Hectare, Great Shelford, Cambridge CB2 5AT, United Kingdom

Citizenship BRITISH

Post Office Address: 18, The Hectare, Great Shelford, Cambridge CB2 5AT, United Kingdom